




SENSAR 1-Piece Hydrophobic Acrylic IOL

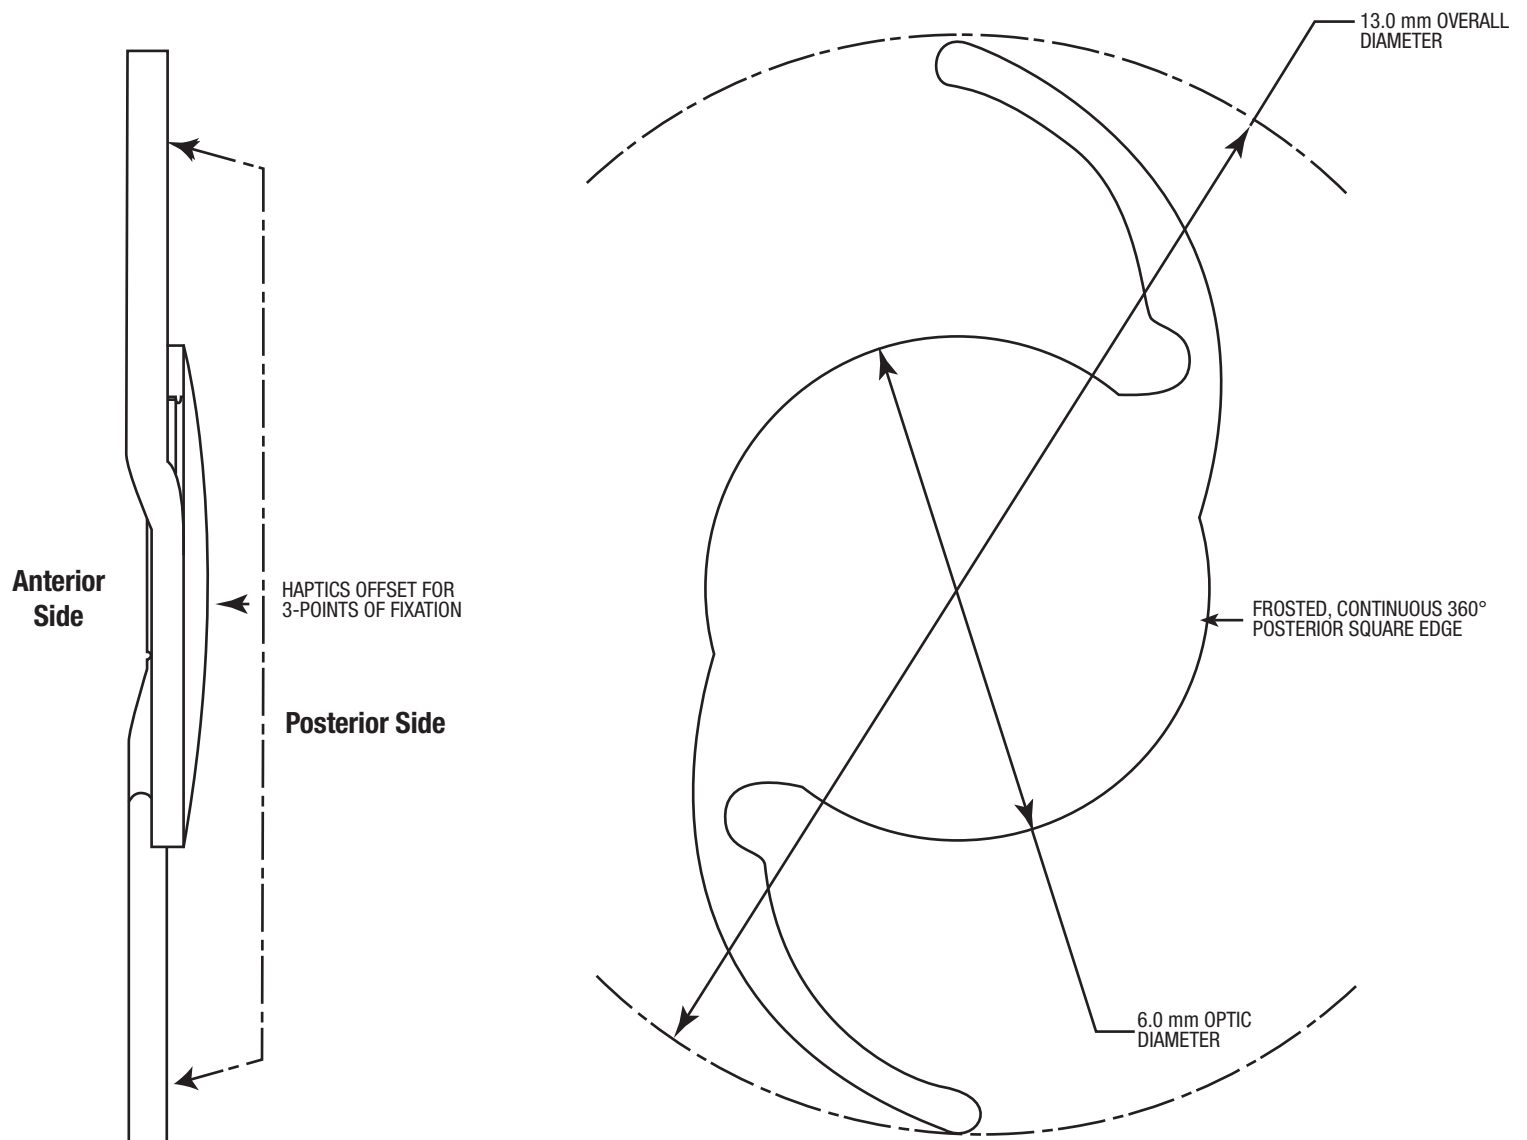

DESCRIPTION	
OPTIC CHARACTERISTICS	
Powers:	+6.0 D to +30.0 D in 0.5 diopter increments
Diameter:	6.0 mm
Material:	UV-blocking hydrophobic acrylic
Refractive Index:	1.47
Edge Design:	ProTECfrost, continuous 360° posterior square edge
ULTRASOUND BIOMETRY*	
A-constant:	118.4
Theoretical AC Depth:	5.2 mm
Surgeon Factor:	1.45 mm
HAPTIC CHARACTERISTICS	
Overall Length:	13.0 mm
Style:	C
Material:	UV-blocking hydrophobic acrylic
Design:	Haptics offset from optic
RECOMMENDED INSERTION INSTRUMENTS	MODEL
UNFOLDER Platinum 1 Series Handpiece UNFOLDER Platinum 1 Series Cartridge One SeriesUltra Implantation System (Syringe-style Inserter) One SeriesUltra Cartridge	DK7796 1MTEC30 DK7786 1VIPR30

*Value theoretically derived for a typical 20.0 D lens. AMO recommends that surgeons personalize their A-constant based on their surgical techniques and equipment, experience with the lens model, and postoperative results.

To learn more and to view important safety information,
please contact your AMO Sales Representative.

1. Calculated based on Holladay I formula (Holladay JT, Prager TC, Chandler TY, Musgrove KH, Lewis JW, Ruiz RS. A three-part system for refining intraocular lens power calculations. J Cataract Refract Surg 1988;14(1):17-24).

SENSAR 1-piece lenses are indicated for the visual correction of aphakia in adult patients in whom a cataractous lens has been removed by extracapsular cataract extraction. These devices are intended to be placed in the capsular bag. For a complete listing of precautions, warnings, and adverse events, refer to the package insert.

One Series, SENSAR, ProTEC and UNFOLDER are trademarks owned by or licensed to Abbott Laboratories, its subsidiaries or affiliates.

©2012 Abbott Medical Optics Inc., Santa Ana, CA 92705 www.AbbottMedicalOptics.com

2012.01.27-CT4600