

# BIO & PACHYMETER AL-4000

POCKET SIZE BIO / PACHYMETER

## DELIGHT IN SIGHT

Compact design.  
Easy to use.  
Simply indispensable.



- Wireless communication
- Axial length + corneal thickness
- Compact body
- Rechargeable battery with AC adapter
- Multiple IOL power calculation
- A-scan diagnostic probe (optional)
- Integrated database software (TB-1000)
- Contact + immersion mode

 **TOMEY**  
TECHNOLOGY AND VISION

# TOMEY BIO / PACHYMETETER AL-4000




## QUALITY IN DETAIL

This extremely handy and easy-to-use combination of Bio and Pachymeter leaves nothing to wish for in terms of comfort and flexibility. Wireless communication plus the fully integrated IOL power calculation software allow for using the complete setup of the handheld device **AL-4000** on the PC.



Just dock your AL-4000 to the A/B scanner UD-8000 and you have the ultimate ultrasound workstation.

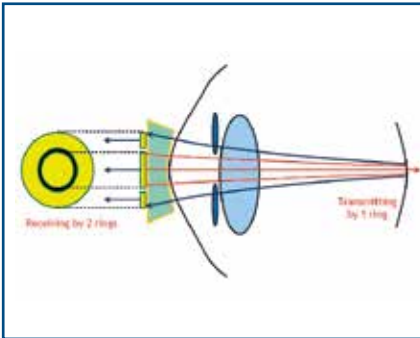

Latest probe technology helps to make results even more reliable and very fast.



Connectable to Laptop or PC wireless or USB.



Full IOL power calculation software.

## SPECIFICATIONS

### BIOMETRY (A-SCAN)

#### Probe

Type	Solid state (immersion option)
Fixlight	Built in the probe, red LED
Transducer frequency	10 MHz
Tip diameter	6.00 mm Ø (concave)
Dimension / Weight	14.0 mm Ø x 98 mm / 40 g

#### Probe modes

Contact, immersion

#### Measurement modes

Automatic	Hand-held, chin rest
Manual	Foot switch

#### Eye modes

Normal & dense cataract, aphakic, pseudophakic (silicone, acrylic & PMMA)

#### Measurement range

Axial length	13.00 to 45.00 mm
ACD	1.80 to 7.00 mm
Lens thickness	2.00 to 6.00 mm
Accuracy	±0.1 mm
Resolution	0.01 mm

#### IOL calculation formulas

Main Unit	SRK/T
PC kit	SRK/T, SRK II, Holladay, Haigis (optimised, standard), Showa, double K SRK/T

### PACHYMETRY

#### Probe

Type	Solid state (disposable tip option)
Transducer frequency	20 MHz
Tip diameter	1.5 mm Ø with an angle of 45° (flat)
Dimension / weight	8.8 mm Ø x 90 mm / 30 g

#### Bias setting range

60-130 % and -600 - +450 µm

#### Measurement range

150 - 1550 µm (accuracy ±5 µm, resolution 1 µm)

### A-SCAN DIAGNOSIS (INCL. PEAK DIFFERENTIAL MODE)

#### Probe


Type	Solid state
Transducer frequency	10 MHz
Tip diameter	5 mm Ø (flat)
Dimension / Weight	8 mm Ø x 97 mm / 30 g

#### MAIN UNIT

Display	3.5" TFT colour LCD touch screen
Dimension (WxDxH)	109 x 52 x 166 mm
Weight	470 g

#### AC adapter

Voltage	100-120 V / 220-240 VAC
Frequency	50 / 60 Hz
Power consumption	10 / 12 VA
Battery	Lithium-ion rechargeable battery



**TOMEY EUROPE**  
**TOMEY GmbH**  
 Wiesbadener Straße 21  
 90427 Nürnberg, Germany  
 Phone +49 911 938 546 2 0  
 Fax +49 911 938 546 2 20  
 Email info@tomey.de

**TOMEY ASIA-PACIFIC**  
**TOMEY CORPORATION JAPAN**  
 2-11-33 Noritakeshinmachi  
 Nishi-ku, Nagoya 451-0051, Japan  
 Phone +81 52 581 5327  
 Fax +81 52 561 4735  
 Email intl@tomey.co.jp

